

## 150Mbps wireless N Nano USB adapter TL-WN725N

### ⦿ Features:

- Miniature design: 0.73x0.59x0.28 in. (18.6x15x7.1 mm)  
Wireless N speed up to 150Mbps
- 14-language utility and auto run CD
- Supports WMM (Wi-Fi Multimedia) Standard for better streaming of real-time data such as Video, Music, Video Chat
- Supports software-based WPS
- Supports Soft AP function for Wireless Internet Sharing
- Advanced Security: Supports 64/128 WEP, WPA/WPA2, WPA-PSK/WPA2-PSK (TKIP/AES), supports IEEE 802.1X
- Supports Windows XP 32/64bit, Vista 32/64bit, Windows 7 32/64bit
- Supports ad-hoc and infrastructure modes
- Supports Sony PSP X-Link for lag-free online gaming for Windows XP
- Seamlessly compatible with 802.11b/g/n products




### ⦿ Description:

TP-LINK's 150Mbps wireless N Nano USB adapter, TL-WN725N allows users to connect a desktop or notebook computer to a wireless network at 150Mbps. This miniature adapter is designed to be as convenient as possible and once connected to a computer's USB port, can be left there, whether traveling or at home. It also features advanced wireless encryption and easy installation.

## ◎ Specifications:

HARDWARE FEATURES	
Interface	USB 2.0
LED	Status
Dimensions (Wx Dx H)	0.73x 0.59x 0.28 in. (18.6x 15x 7.1mm)
Weight	0.07 ounces / 2.1 grams (Without packaging)
Antenna	Internal antenna
WIRELESS FEATURES	
Wireless Standards	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n
Frequency	2.400-2.4835GHz
Signal Rate	11b: Up to 11Mbps (dynamic) 11g: Up to 54Mbps (dynamic) 11n: Up to 150Mbps (dynamic)
EIRP	<20dBm 130M: -68dBm@10% PER 108M: -68dBm@10% PER 54M: -68dBm@10% PER 11M: -85dBm@8% PER 6M: -88dBm@10% PER 1M: -90dBm@8% PER
Reception Sensitivity	
Wireless Modes	Ad-Hoc / Infrastructure mode
Wireless Security	Supports 64/128 WEP, WPA/WPA2, WPA-PSK/WPA2-PSK (TKIP/AES), supports IEEE 802.1X
Modulation Technology	DBPSK, DQPSK, CCK, OFDM, 16-QAM, 64-QAM
OTHERS	
Certification	CE, FCC, IC, RoHS
System Requirements	Windows 7(32/64bits), Windows Vista(32/64bits), Windows XP(32/64bits)
Environment	Operating Temperature: 0 C ~40 C (32 F ~104 F) Storage Temperature: -40 C ~70 C (-40 F ~158 F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing

## Diagram:

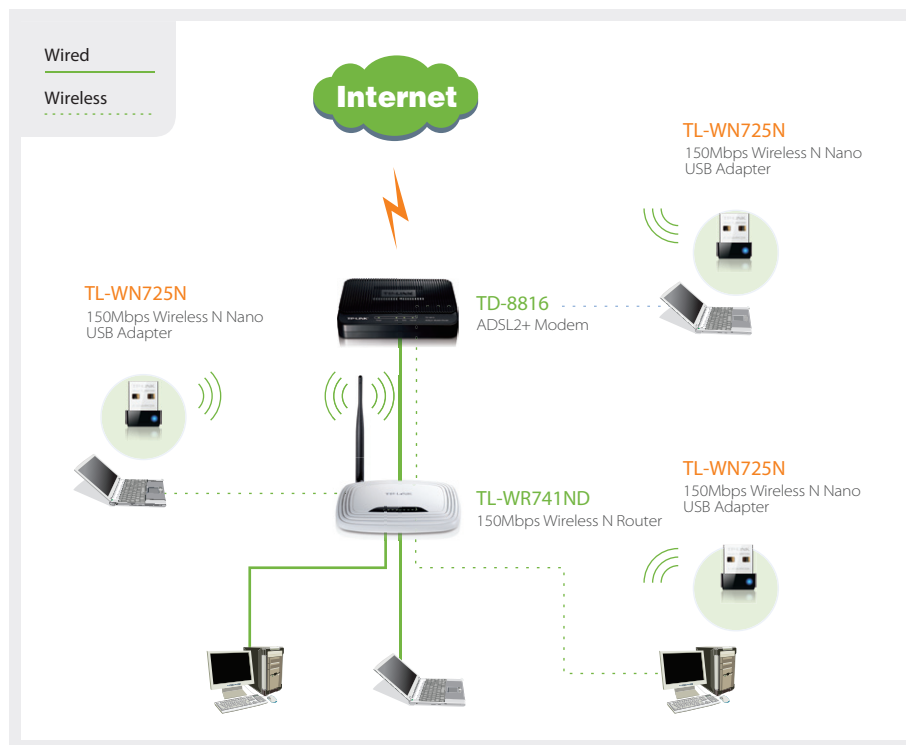

### Specifications:

- 150Mbps wireless N Nano USB adapter TL-WN725N
- Resource CD
- Quick Installation Guide

### Related Products:

- 150Mbps Wireless N Router TL-WR741ND & TL-WR740N
- ADSL2+ Modem TD-8816